



PHOENIX FENCE

EDMONTON


12816-156 STREET T5V 1E9
PHONE: (780) 447-1919
FAX: (780) 447-2512
TOLL FREE: 1-800-661-9847
E-MAIL: phoenix@phoenixfence.ca

CALGARY


6204-2nd STREET S.E. T2H 1J4
PHONE: (403) 259-5155
FAX: (403) 259-2262
TOLL FREE: 1-888-220-2525
E-MAIL: calgary@phoenixfence.ca

WEBSITE: www.phoenixfence.ca

Cantilever Sliding Gates (Commercial and Industrial)

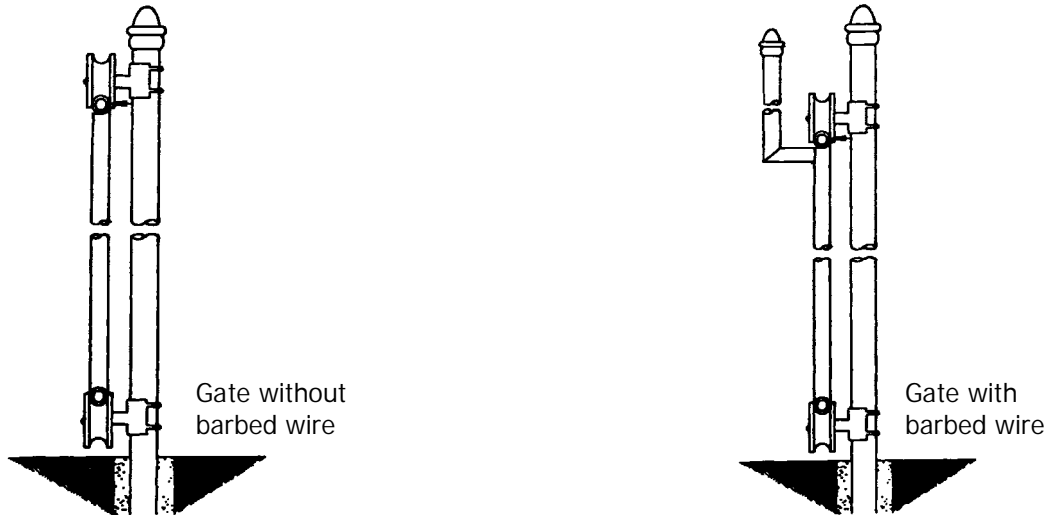

- Must be used for automatic slide gate operators.
- Excellent for areas where the arc of the swing gate will interfere with storage area or roadways.
- Maximum single gate opening width of 30' (double gate width of 60').
- Most common single gate opening width of 24'.
- Gate is fully supported off the ground on four rollers.
- Gate posts (3 required for single gate, 4 required for double gate) are to be 3 1/2" O.D. Schedule 40. Four rollers required per gate panel.

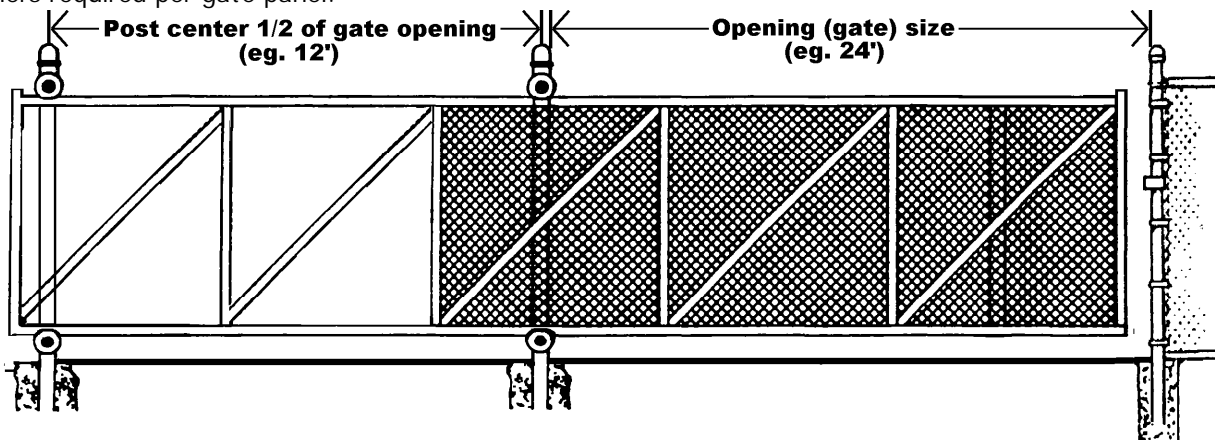

Total gate length = opening size x 1.5, then add 1' (eg. 24' opening: 24' x 1.5 = 36', 36' + 1' = 37')

Construction: 1 7/8" O.D. Schedule 40 top/bottom rails and end uprights
1 3/8" O.D. .090 wall vertical and horizontal braces

Gate posts: Gate posts on either side of gate opening are to be set to the actual opening (eg. 24') face to face of post. Gate posts for the counter balance are set to be 1/2 of the opening from center to center of post (eg. 12' for a 24' gate).